
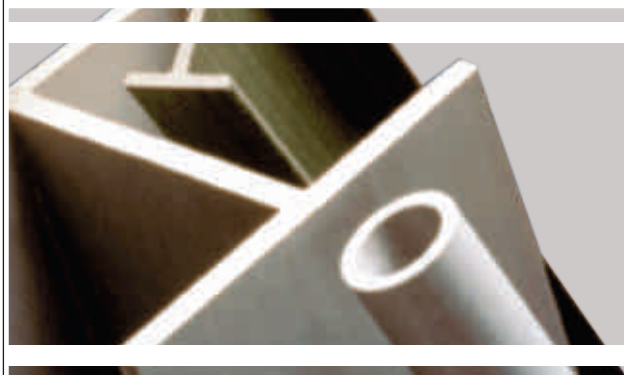


Composite Pultrusion Machine

Cater Pillar Puller



Ashirvad *Industries*

Plot No. 1907, Phase-II, G.I.D.C., Industrial Estate,
Chhatral, Dist: Gandhinagar, Gujarat (INDIA) Pin: 382729

Phone : +91 2764 234017 | Fax: +91 2764 232498 | Mobile: +91 9825286770
Email: info@ashirvadind.com | Website : www.ashirvadtechno.com

Cater Pillar Pultrusion Machine

Specifications

Pulling Capacity	1000 kgf. - 4000 kgf.		
Product Size Range Width X Height	6mm X 3mm - 125mm X 50mm		
Pulling Speed mm/min.	0.02 Meter/Min. - 4.0 Meter/Min.		
Die Clamping Bed	800mm (W) X 1000mm (L)		
Puller Width	100mm - 300mm		
Pulling Action	Mechanical Power Transmission and Chain with Pulling Pades		
Clamping Force	By Pneumatic Cylinders		
Heating Zone	3 - 4 Nos.		
Electrical Power Required	2.0 - 3.5 kW. Heating Requirement (Depending up on size of mould)		
Compressed Air Required	3 - 4 cfm at 5 - 6 kg/cm ² Pressure		
Approximately Oveall Dimensions	Length 2500 - 3000mm	Width 600 - 1100mm	Height 2100mm

